

## **Stochastic Modelling of Annual Rainfall at New-Bussa**

Lawal Adamu<sup>1</sup>, Hakimi Danladi<sup>2</sup>, Laminu Idris<sup>3</sup>

*1. Centre for preliminary and Extra-mural Studies, Federal University of Technology Minna, Nigeria.*

*2. Department of Mathematics and Statistics, Federal University of Technology Minna, Nigeria*

*3. Department of Mathematics and Statistics, Federal University of Technology Minna, Nigeria*

---

**Abstract:** *This paper deals with the variations of annual rainfall in New-Bussa based on Markov Chain models. This principle was used to formulate a three state model for annual rainfall distribution in New-Bussa. The model is designed such that if given any of the three state in a given year, it is possible to determine quantitatively the probability of making transition to any other two states in the following year(s) and in the long-run. The result from the model shows that in the long-run 70% of the annual rainfall in New-Bussa will be State 1, 27% will be state 2 and 3% of the annual rainfall will be State 3. The model could therefore be used to make a forecast of the annual rainfall pattern. This could provide some information for the Crop and Fish farmers, artisanal Fishermen, the Hydroelectric power generating station and the government that could be used to plan strategies to boost their production in New-Bussa and the environment.*

**Keywords:** *Markov Model, Transition probability, annual rainfall, crop and fish farmers*

---

### **I. Introduction**

Rainfall modelling and prediction is increasingly in demand because of the uncertainty that is involved with rainfall and the dependence of Agriculture production and management of water resource on rainfall variability and quantity. The generation of rainfall and other climate data needs a range of models depending on the time and spatial scales involved. Cox and Isham (1994) reported in [4] presented three broad types of rainfall models, namely, empirical statistical models, models of dynamic meteorology and intermediate stochastic models. The idea behind this classification is the amount of physical realism incorporated into the model structure. In the empirical statistical models, empirical stochastic models are fitted to the available data. The models for the generation of annual, monthly and daily rainfall and climate data are of this type. In the models of dynamic meteorology, large systems of simultaneous nonlinear partial differential equations, representing fairly realistically the physical processes involved, are solved numerically. These are generally used for weather forecasting and not for data generation. In intermediate stochastic models, a modest number of parameters are used to represent the rainfall process, the parameters being intended to relate to underlying physical phenomena such as rain cells, rain bands and cell clusters. These types of models are used for the analysis of data collected at short time interval such as hourly. Gabriel and Neumann [5] studied the sequence of daily rainfall occurrence. They found that the daily rainfall occurrence for Tel Aviv data was successfully fitted with the first-order Markov chain model. Meanwhile, Kottegoda et al. [7] reported that a first order Markov chain model was found to fit the observed data in Italy successfully. The model was based on the assumption that there is a dependency of the daily rainfall occurrence to that of the previous day. Allen and Haan [1] used a multi-state (7 x 7) Markov chain model and employed a uniform distribution for each of the wet states except for the last, for which an exponential distribution was used. Due to the lack of sufficient number of data items in the last class for each month, the values in this class were lumped together and only one value of the exponential parameter was estimated to generate the rainfall depth in the last class for all the months. Tamil and Samuel [9] used Markov chain to model annual rainfall in Tamil Nadu, India, 100 years (1901-2000) annual rainfall data was used. Class interval was formed for the data and each treated like a state, seven states were obtained and (7x7) matrix formed the transition probability matrix. The uniform random states were also formed by generating uniform random number. Which was used to generate synthetic time series for states. When the synthetic time series was compared with the actual rainfall data it was discovered that, the year 2001 and 2002 actual rainfall values do not match with the synthetic rainfall values for these years. They concluded that the long range forecasting based on the model does not give more accuracy but could be used only to forecast the future trend, the same Markov chain can be further developed to forecast with high accuracy. Markov modelling is one of the tools that can be utilized to assist planners in assessing the rainfall. Akintunde et al [2] modified the Chapman-Kolmogorov Equation (CKE) and applied it to model the daily precipitation data of Abeokuta, Ogun State, Nigeria. This gave the best fit for precipitation pattern which is relevant in the development of new growth and yield models of major crops such as maize, sorghum and soybean; enabling farmers to estimate the distribution of crop yield as the growing season progressed. Jimoh and Webster [3] determined the optimum order of a Markov chain model for daily rainfall occurrences at 5 locations in Nigeria using AIC and BIC. It was concluded that caution is needed with the use of AIC and BIC for determining the optimum order of the Markov model and the use of

frequency duration curves can provide a robust alternative method of model identification. Jimoh and Webster [6] also investigated the intra-annual variation of Markov chain parameters for 7 sites in Nigeria. They found that there was a systematic variation in the probability of a wet day following a dry day as one moves northwards and limited regional variation. A general conclusion is that a first order Markov model is adequate for many locations but second or higher order model may be required at other locations or during sometimes of the year. Abubakar et al [10] formulate a four state Markov model of annual rainfall in Minna with respect to crop production in the region. They discovered that most of the annual rainfall in Minna in the long-run will be Moderate rainfall. This paper therefore, considers a three state model in discrete time to predict annual rainfall pattern in New Bussa. New Bussa is located at 9°53'N, 4°31'E (altitude 561ft or 170 meters), Borgu local government area of Niger state, Nigeria. One of the Hydroelectric Power generating stations of the country is located in this area. Most of people that live in this area are Fish farmers, artisanal fishermen and crop farmers because of the Hydroelectric Power generating Dam and the surrounding rivers. The data used in the research work was collected from archive of National Institute for Freshwater Fisheries Research (NIFFR), New-Bussa.

**II. Formulation of The Model**

Suppose that the amount of annual rainfall in New Bussa in a year is considered as a random variable  $X$  the collection of this random variable over the years (n) constitutes a stochastic process  $X_n$ ,  $n = 0, 1, 2, 3, \dots$  Abubakar et al [11]

It is assumed that this stochastic process satisfies Markov property of first order dependence. A first order Markov chain could be defined as a sequence  $X_0, X_1, \dots$  of random variables with the property that the conditional probability distribution of  $X_{n+1}$  given  $X_0, X_1, \dots, X_n$  depends only on the value of  $X_n$  but not further on  $X_0, X_1, \dots, X_{n-1}$ . That is, for any set of values  $h, i, \dots, j$  in discrete state space  $P(X_{n+1} = j | X_0 = h, \dots, X_n = i) = P(X_{n+1} = j | X_n = i) = P_{ij}$ ,  $i, j = 1, 2, 3, \dots$  Howard (8). Let the annual rainfall be modelled by three State, Markov model.

- State1:** Annual rainfall within the of range 640mm - 1102.3mm
- State2:** Annual rainfall within the of range 1102.3mm - 1564.6mm
- State3:** Annual rainfall within the of range 1564.6mm - 2026.9mm

The transition between the states is described by the transition diagram in figure 1 and probability Matrix P.

$$P = \begin{bmatrix} p_{11} & p_{12} & p_{13} \\ p_{21} & p_{22} & 0 \\ p_{31} & 0 & 0 \end{bmatrix}$$

The matrix P is homogeneous transition stochastic matrix because all the transition probabilities  $P_{ij}$  are fixed and independent of time. The transition probabilities must satisfy

$$p_{ij} \geq 0, \quad i, j = 1, 2, 3 \quad \text{and} \quad \sum_{j=1}^3 p_{ij} = 1, \quad i = 1, 2, 3$$

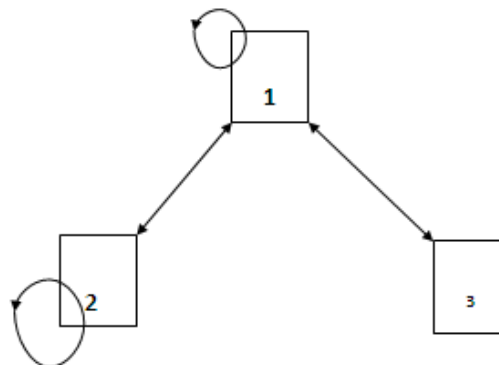


Figure 1. The Transition Diagram for the model

Following Cox and Miller [12] and Abubakar et al [10]

Let  $P^{(n)}$  for  $n = 0,1,2,\dots$  be our probability state vectors of the Markov chain, where  $P_i^{(n)}$  is the probability that the annual rainfall is in the  $i^{th}$  state at the  $n^{th}$  observation. In particular,  $P^{(0)}$  is the initial state vector of the Markov chain and  $P^{(n)}$  is the state vector at the  $n^{th}$  observation

$$P^{(n+1)} = P^{(n)}P \tag{1}$$

Where  $P$  is our transition matrix and  $P^{(n+1)}$  is the state vector at the  $(n+1)^{th}$  observation. on iteration, we have

$$P^{(n)} = P^{(0)}P^n \tag{2}$$

Thus the initial state vector  $P^{(0)}$  and the transition matrix  $P$  determine the state vector  $P^{(n)}$  at the  $n^{th}$  year.

$$P^{(n)} = [p_1^n \quad p_2^n \quad p_3^n]$$

denote the probabilities of finding the annual rainfall in any of the three states at the  $n^{th}$  year

$$P^{(0)} = [p_1^0 \quad p_2^0 \quad p_3^0]$$

denotes the initial state vector, then the three state First order Markov Chain model for prediction of annual rainfall in New-Bussa can be written as:

$$[p_1^n \quad p_2^n \quad p_3^n] = [p_1^0 \quad p_2^0 \quad p_3^0] \begin{bmatrix} P_{11} & P_{12} & P_{13} \\ P_{21} & P_{22} & 0 \\ P_{31} & 0 & 0 \end{bmatrix}^n \tag{3}$$

**Limiting State Probabilities**

The state occupation probabilities is independent of the starting state of the process, if number of the time the state transition is large thus the process reaches a steady state after a sufficiently large period of time. This is equilibrium distribution

$$\pi = (\pi_1 \quad \pi_2 \quad \pi_3) \text{ Howard}[8]$$

If we let  $n \rightarrow \infty$  in equation (2) we have

$$\pi = \pi P \tag{4}$$

$$\text{and also } \pi = \sum_{i=1}^3 \pi_i = 1 \text{ Abubakar et al [10]}$$

these equations will be use to find the limiting state probabilities for our model

**III. Application**

**Table1:** A summary of annual rainfall in New-Bussa between 1980-2013 and states distribution(source :[13])

Annual rainfall in mm	Frequency	State
640-1102.3	24	1
1102.3-1564.6	9	2
1564.6-2026.9	1	3

The transition count matrix is shown below

$$M = \begin{bmatrix} 18 & 4 & 1 \\ 4 & 5 & 0 \\ 1 & 0 & 0 \end{bmatrix} \tag{5}$$

From equation (5), using the maximum likelihood estimator i.e

$$P_{ij} = \frac{f_{ij}}{\sum_{j=1}^3 f_{ij}} \quad ij = 1,2,3 \text{ Tamil and Samuel [9]}$$

Where  $f_{ij}$  is the historical frequency of transition from state  $i$  to state  $j$ , we to obtained the probability matrix given below

$$P = \begin{bmatrix} \frac{18}{23} & \frac{4}{23} & \frac{1}{23} \\ \frac{4}{9} & \frac{5}{9} & 0 \\ 1 & 0 & 0 \end{bmatrix} \quad P = \begin{bmatrix} 0.783 & 0.174 & 0.043 \\ 0.444 & 0.556 & 0 \\ 1 & 0 & 0 \end{bmatrix}$$

**n-Step Transition Probability**

From equation (1), we have on iteration

$$P^2 = \begin{bmatrix} 0.733 & 0.233 & 0.034 \\ 0.595 & 0.386 & 0.019 \\ 0.783 & 0.174 & 0.043 \end{bmatrix}$$

$$P^6 = \begin{bmatrix} 0.698 & 0.272 & 0.030 \\ 0.694 & 0.276 & 0.030 \\ 0.699 & 0.271 & 0.030 \end{bmatrix}$$

$$P^{10} = \begin{bmatrix} 0.697 & 0.273 & 0.030 \\ 0.697 & 0.273 & 0.030 \\ 0.697 & 0.273 & 0.030 \end{bmatrix} \tag{6}$$

$$P^{10} = \begin{bmatrix} 0.70 & 0.27 & 0.03 \\ 0.70 & 0.27 & 0.03 \\ 0.70 & 0.27 & 0.03 \end{bmatrix} \text{ corrected to 2 decimal places}$$

**Limiting State Probabilities**

As  $n$  increases  $P^n$  gets closer and closer to (6) that is,  $n \geq 10$  the transition probabilities stabilises to (6) and from equation (2) with the initial state probability vector  $(1 \ 0 \ 0)$  we have

$$p^0 p^n = (1 \ 0 \ 0) \begin{bmatrix} 0.697 & 0.273 & 0.030 \\ 0.697 & 0.273 & 0.030 \\ 0.697 & 0.273 & 0.030 \end{bmatrix} = (0.697 \ 0.273 \ 0.030)$$

$$= (0.70 \ 0.27 \ 0.03) \text{ corrected to 2 decimal places}$$

From equation (4) and (6) the limiting state vector is given by

$$\pi = \pi P = (0.70 \ 0.27 \ 0.03)$$

**IV. Discussion of Result**

The result shows that the probabilities to have a rainfall in state 1, state 2, and state 3, in the first year, giventhat it is in state 1 at present are 0.783,0.174 and0.043 respectively. The probabilities of state 1 and state 2 dropped slowly to 0.70 and 0.03 in about ten years. However, the probability of state 2 increased to the

maximum of 0.27 within the same period of time. This shows that in the long-run 70% of the annual rainfall in New-Bussa will be State1, 27% will be state 2 and 3% of the annual rainfall will be State 3. These equilibrium probabilities are independent of the initial state. That is be it in State 1, State2 and State 3. The model could therefore be used to make a forecast of the annual rainfall pattern. This could providesome information for the Crop andFish farmers, artisanalFishermen , the Hydroelectric Power generating station and the government thatcould be used to plan strategies to boost their production in area.

### **References**

- [1]. Allen, D.M. and Haan, C.T., (1975). Stochastic simulation of daily rainfall. Res. Rep. No. 82 Water Resour. Inst., Univ., Lexington, Kentucky, USA
- [2]. Akintunde A.A, Asiribo O.E, Adebajji A.O, Adelakun A.A Agwuegbo S.O.N. (2008) Stochastic modelling of daily precipitation in Abeokuta, proceedings of the third Conference on science and National Development pp108-118 [www.unaab.edu.ng/journal/index.php/COLNAS/article/.../150/153](http://www.unaab.edu.ng/journal/index.php/COLNAS/article/.../150/153). Accessed 15/10/2012.
- [3]. Jimoh, O. D. and Webster, P. (1996). Optimum order of Markov chain for daily rainfall in Nigeria. Journal of Hydrology 185: 45-69.
- [4]. RatnasinghamSrikanthan and Tom McMahon(2000):Stochastic Generation ofClimate Data, A Review:Technical Report 00/16, Cooperative Research Centre for Catchment Hydrology, Australia
- [5]. Gabriel, K. R. and Neumann, J. (1962) A Markov chain model for daily rainfall occurrences at Tel Aviv. Quart. J. Roy. Met. Soc. 88:90-95
- [6]. Jimoh, O. D. and Webster, P. (1999). Stochastic modelling daily rainfall in Nigeria: intra- annual variation of model parameters. Journal of Hydrology 222:1- 17.
- [7]. Kottegoda, N. T., Natale, L. and Raiteri, E. (2004); Some considerations of periodicity and persistence in daily rainfalls, J. Hydrol. 296:23–37.
- [8]. Howard R.A.(1971), Dynamic Probabilistic Systems, Vols.1and2. John Wiley, New York.
- [9]. Tamil.S. and Samuel, S. (2011). Stochastic Modelling of Annual Rainfall at Tamil Nadu, Universal Journal of Environmental Research and Technology, Volume 1, Issue 4: 566-570
- [10]. AbubakarUsman Yusuf, LawalAdamu, MuhammedAbdullahi(2014). Markov Chain Model and Its Application to Annual Rainfall Distribution for Crop Production. *American Journal of Theoretical and Applied Statistics*. Vol. 3, No. 2, pp. 39-43.
- [11]. Abubakar U.Y., Lawal A., Muhammed A. (2013). The Use of Markov Model in Continuous Time for the Prediction ofRainfall for Crop Production, International Organization of Scientific Research, (IOSR) Vol.7, Issue1, pp 38 – 45.
- [12]. Cox D.R., and Miller H.D. (1984). The Theory of Stochastic Processes. Chapman and Hall London.
- [13]. The archive of National Institute for Freshwater Fisheries Research(NIFFR), New-Bussa(2014)